

Till 'N Seed® Results

These plots were sprayed with glyphosate before planting. On Day 1, the Till 'N Seed was used to plant a premium ryegrass mix and bluegrass/ryegrass mix.



DAY 1



DAY 8



DAY 12



DAY 14



DAY 19




DAY 27



DAY 33



DAY 36

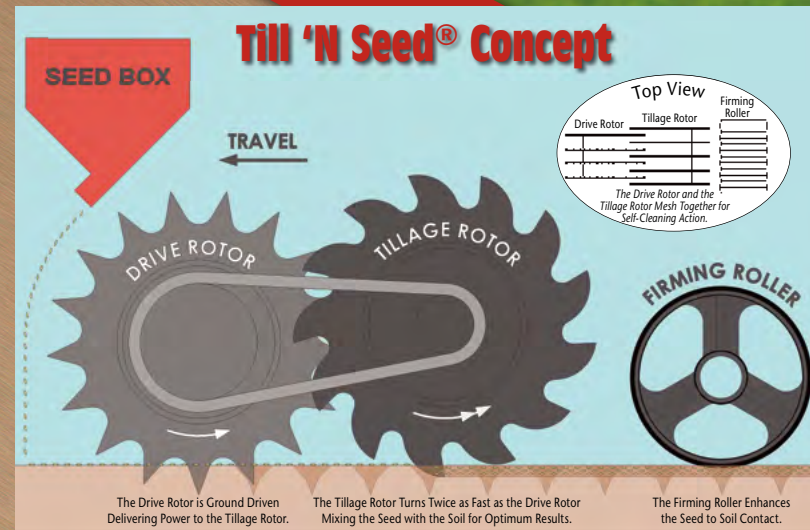

SPECIFICATIONS

	BPSB-6
Weight (Empty)	2,120 lbs. (962 kg)
Three-Point Hitch Type	Cat. I, II, Quick-Attach, iMatch™ Compatible
Tractor Horsepower Range	35 to 60 HP (26 to 45 kW)
Tractor Lift Capacity Requirement	2,150 lbs. (977 kg) 24 in. (610 mm) Behind Lift Arms
Overall Width	90 in. (2.29 m)
Working Width	72 in. (1.83 m)
Base Unit Length	46 in. (1.17 m)
Unit Height	50 in. (1.27 m)
Recommended Speed	4 to 8 MPH (6.4 to 12.9 km/h) (Dependent on Conditions)
Acres/Hour	2.9 @ 4 MPH, 5.8 @ 8 MPH
Rotor Axles	1.75 in. (44.45 mm) Square Shaft
Rotor & Roller Bearings	1.5 in. (38.1 mm) Greaseable Bearings
Drive Rotor (Front)	414 lbs. (193 kg)
Number of Blades	31
Blade Material	Abrasion Resistant Steel
Blade Spacing	2.25 in. (57.15 mm)
Blade Thickness	0.313 in. (7.95 mm)
Blade Diameter	13 in. (330.2 mm) OD
Drive Type	Ground
Tillage Rotor (Middle)	351 lbs. (166 kg)
Number of Blades	32
Blade Material	Abrasion Resistant Steel
Blade Spacing	2.25 in. (57.15 mm)
Blade Thickness	0.188 in. (4.78 mm)
Blade Diameter	13 in. (330.2 mm) OD
Drive Ratio	2:1
Rotor Speed	197 RPM @ 4 MPH, 394 RPM @ 8 MPH
Independent Floatation	Standard
Down Force Adjustability	Standard
Drive Type	# 80 Roller Chain
Firming Roller (Rear)	231 lbs. (105 kg)
Number of Cast Wheels	37
Independent Floatation	Standard
Air Shock	Standard
Air Pressure Range	20 to 120 psi (138 to 827 KPa)
Frame Construction	All Welded Structural Steel
Seed Box	Standard - Front & Rear
Seed Box Capacity	4.5 Bushels (158.5 l) + 1.4 Bushels (49.3 l)
Seed Metering	High Capacity Micro-Meter/Standard Micro-Meter
Seed Metering Drive	Positive Ground Driven
Drive Type	Roller Chain
Electronic Acre Meter	Optional
Powder Coat Paint, Red	Standard

Specifications subject to change without notice.



www.facebook.com/landollag

TNS_0211_Z_0216

Also available from
Brillion Farm Equipment



Pulverizers



Pulvi-Mulchers



Agricultural & Landscape Seeders



Food Plot Seeders



220 N. Francis Street

P.O. Box 8

Brillion, WI 54110

Phone: 920.524.2220

Toll Free: 855.320.0373

Fax: 888.761.8568



TILL 'N SEED®

A LANDOLL PRODUCT



- 72" Seeding Width
- Rugged Structural Steel Frame
- Ground Driven Micro-Meter Seed Boxes
- Floating Cast Iron Firming Roller
- Floating Self-Cleaning Tillage Rotor
- Adjustable Tillage Rotor Down Pressure
- Great for:
 - Renovating Pastures
 - Restoring Athletic Fields & Lawns
 - De-thatching Lawns
 - Planting and Shredding Food Plots



www.brillionfarmeq.com

